


ULTRAPURE FILTER HOUSINGS

Stainless steel bag filter housings

Features & Benefits

- High quality stainless steel SUS304 or SUS316L material
- Convenient clamp closures for easy bag filter replacement
- Bag filter housings are ideal for a wide range of applications
- Pipe fittings, drains and vents are readily accessible for easy installation
- Maximum operating pressure 100 psi / 6 bar
- Models come with mounting tabs
- Housings are designed to accept standard sized bag filter
- Available in polished or sandblast external surface

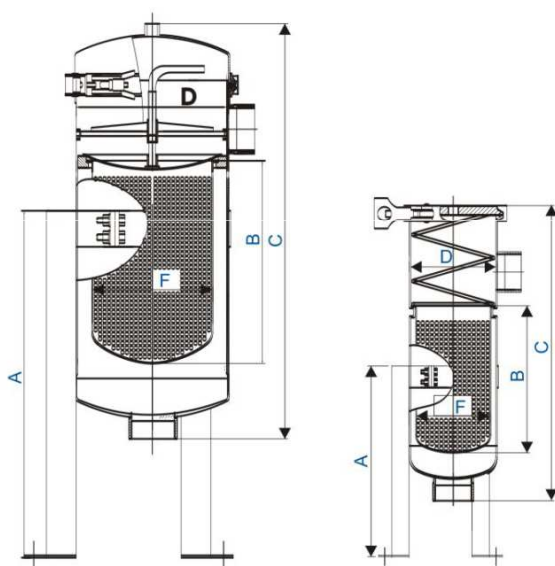

Bag filters can be washed and comes in 5-50 micron rating

Specification

Model	No. of filter bag	Size	Inlet	Outlet	Vent
HOSSFB620	1	6" OD x 20"L	2"	2"	1/4" FNPT
HOSSFB732	1	7" OD x 32"L	2"	2"	1/4" FNPT

Model	A	B	C	D	F
HOSSFB620	500 mm	380 mm	700 mm	Ø 200 mm	Ø 170 mm
HOSSFB732	700 mm	720 mm	1050 mm	Ø 200 mm	Ø 170 mm

Bag filter housings of various sizes, closures and lengths are available on request.

Note: UltraPure Private Limited reserves the right to make any changes to the information provided above without prior notice



ULTRAPURE PRIVATE LIMITED 122 Joo Chiat Road, Singapore 427411
Tel: (65) 64403680 Fax: (65) 64403679 Email: info@ultrapure.com.sg Website: www.ultrapure.com.sg