

ULTRAPURE FILTER HOUSINGS


Multi-cartridge stainless steel filter housings

Features & Benefits

- High quality stainless steel SUS304 or SUS316L material
- Convenient clamp closures for easy cartridge replacement
- Multi-cartridge housings are ideal for a wide range of applications
- Pipe fittings, drains and vents are readily accessible for easy installation
- Maximum operating pressure 100 psi / 6 bar
- Models come with mounting tabs
- Lid is fitted with a 1/4" female NPT connection for easy fitting of a vent or gauge
- Housings are designed to accept DOE cartridges
- Available in polished or sandblast external surface



Standard 40" string wound cartridges

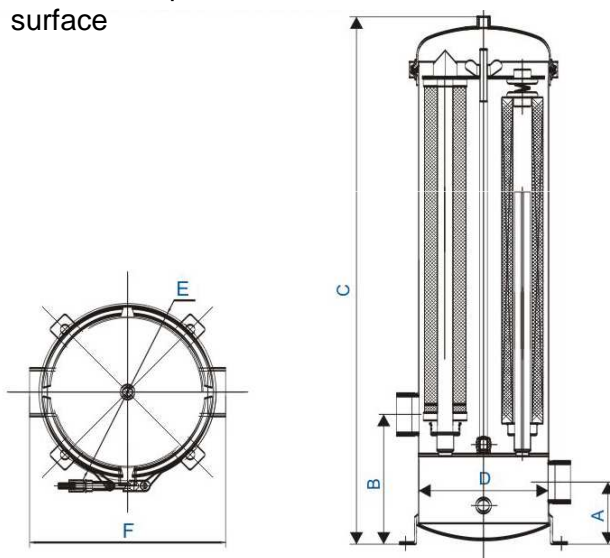

Specification

Model	No. of cartridges	Cartridge Length	Inlet & Outlet	Drain	Vent
W5L4	5	40"	1.5"	1/4" FNPT	1/4" FNPT
W7L4	7	40"	2"	1/2" FNPT	1/4" FNPT
W20L4	20	40"	3"	3/4" FNPT	1/4" FNPT

Model	A	B	C	D	E	F
W5L4	120 mm	220 mm	1360 mm	200 mm	248 mm	260 mm
W7L4	120 mm	220 mm	1370 mm	250 mm	310 mm	310 mm
W20L4	150mm	800mm	1440mm	400mm	460mm	560mm

Multi cartridge housings of various sizes, closures and lengths are available on request.



ULTRAPURE PRIVATE LIMITED 122 Joo Chiat Road, Singapore 427411

Factory: 32 Marsiling Lane, Singapore 739151

Tel: +65 64403680 Fax: +65 64403679 Email: info@ultrapure.com.sg Website: www.ultrapure.com.sg

Note: UltraPure Private Limited reserves the right to make any changes to the information provided above without prior notice